




Technical specifications


Models	Head / PTZ
Encoder	Incremental
Resolution	1 638 counts/cm
Accuracy	0.00061 cm
Travel	44 cm
Max Velocity	0.086 m/s
Torque	100-150 Nm
Elevation	70-112 cm
Remote control	IP with Web interface, SPIRIT Joystick, multiCAM Suite, UDP (SPIRIT protocol)
Genlock IN (*)	Black Burst / Tri-Level (External box or through Dolly XLR connection)
Compatibility	SPIRIT Dolly / Head
Tracking	Free-D (encoding data with AR pack)
Network (*)	1x RJ45 (External box or through Dolly XLR connection)
Power IN	24Vdc 5A
Power OUT (*)	24Vdc (External box: XLR 7 points for HEAD or PTZ)
Dimensions	24 cm (W) x 12cm (D) Height: 38 cm (M) / 48 cm (L)
Weight	6.5 kg / 7.2 kg

^(*) A direct connection between Lift and Dolly includes Genlock, Power and Network when combined. If Lift is used without Dolly, an external box is dedicated for connections.





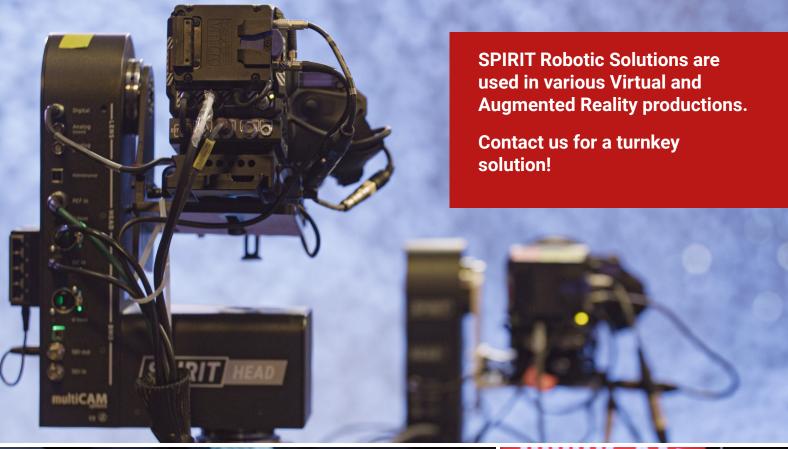

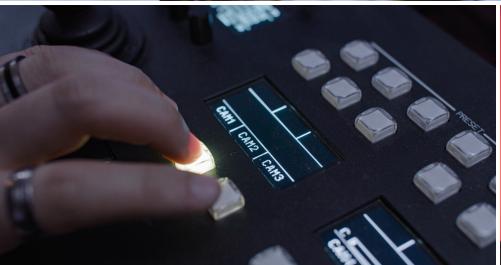









Contact us to receive our pricing list and live demo invites!

sales@multicam-systems.com

